



**PROGRESSIVE
MATERIALS**

PREMIUM COATING SYSTEMS




Product Catalog

Silicones | Acrylics | Primers | Accessories



PROGRESSIVE
MATERIALS

PREMIUM COATING SYSTEMS

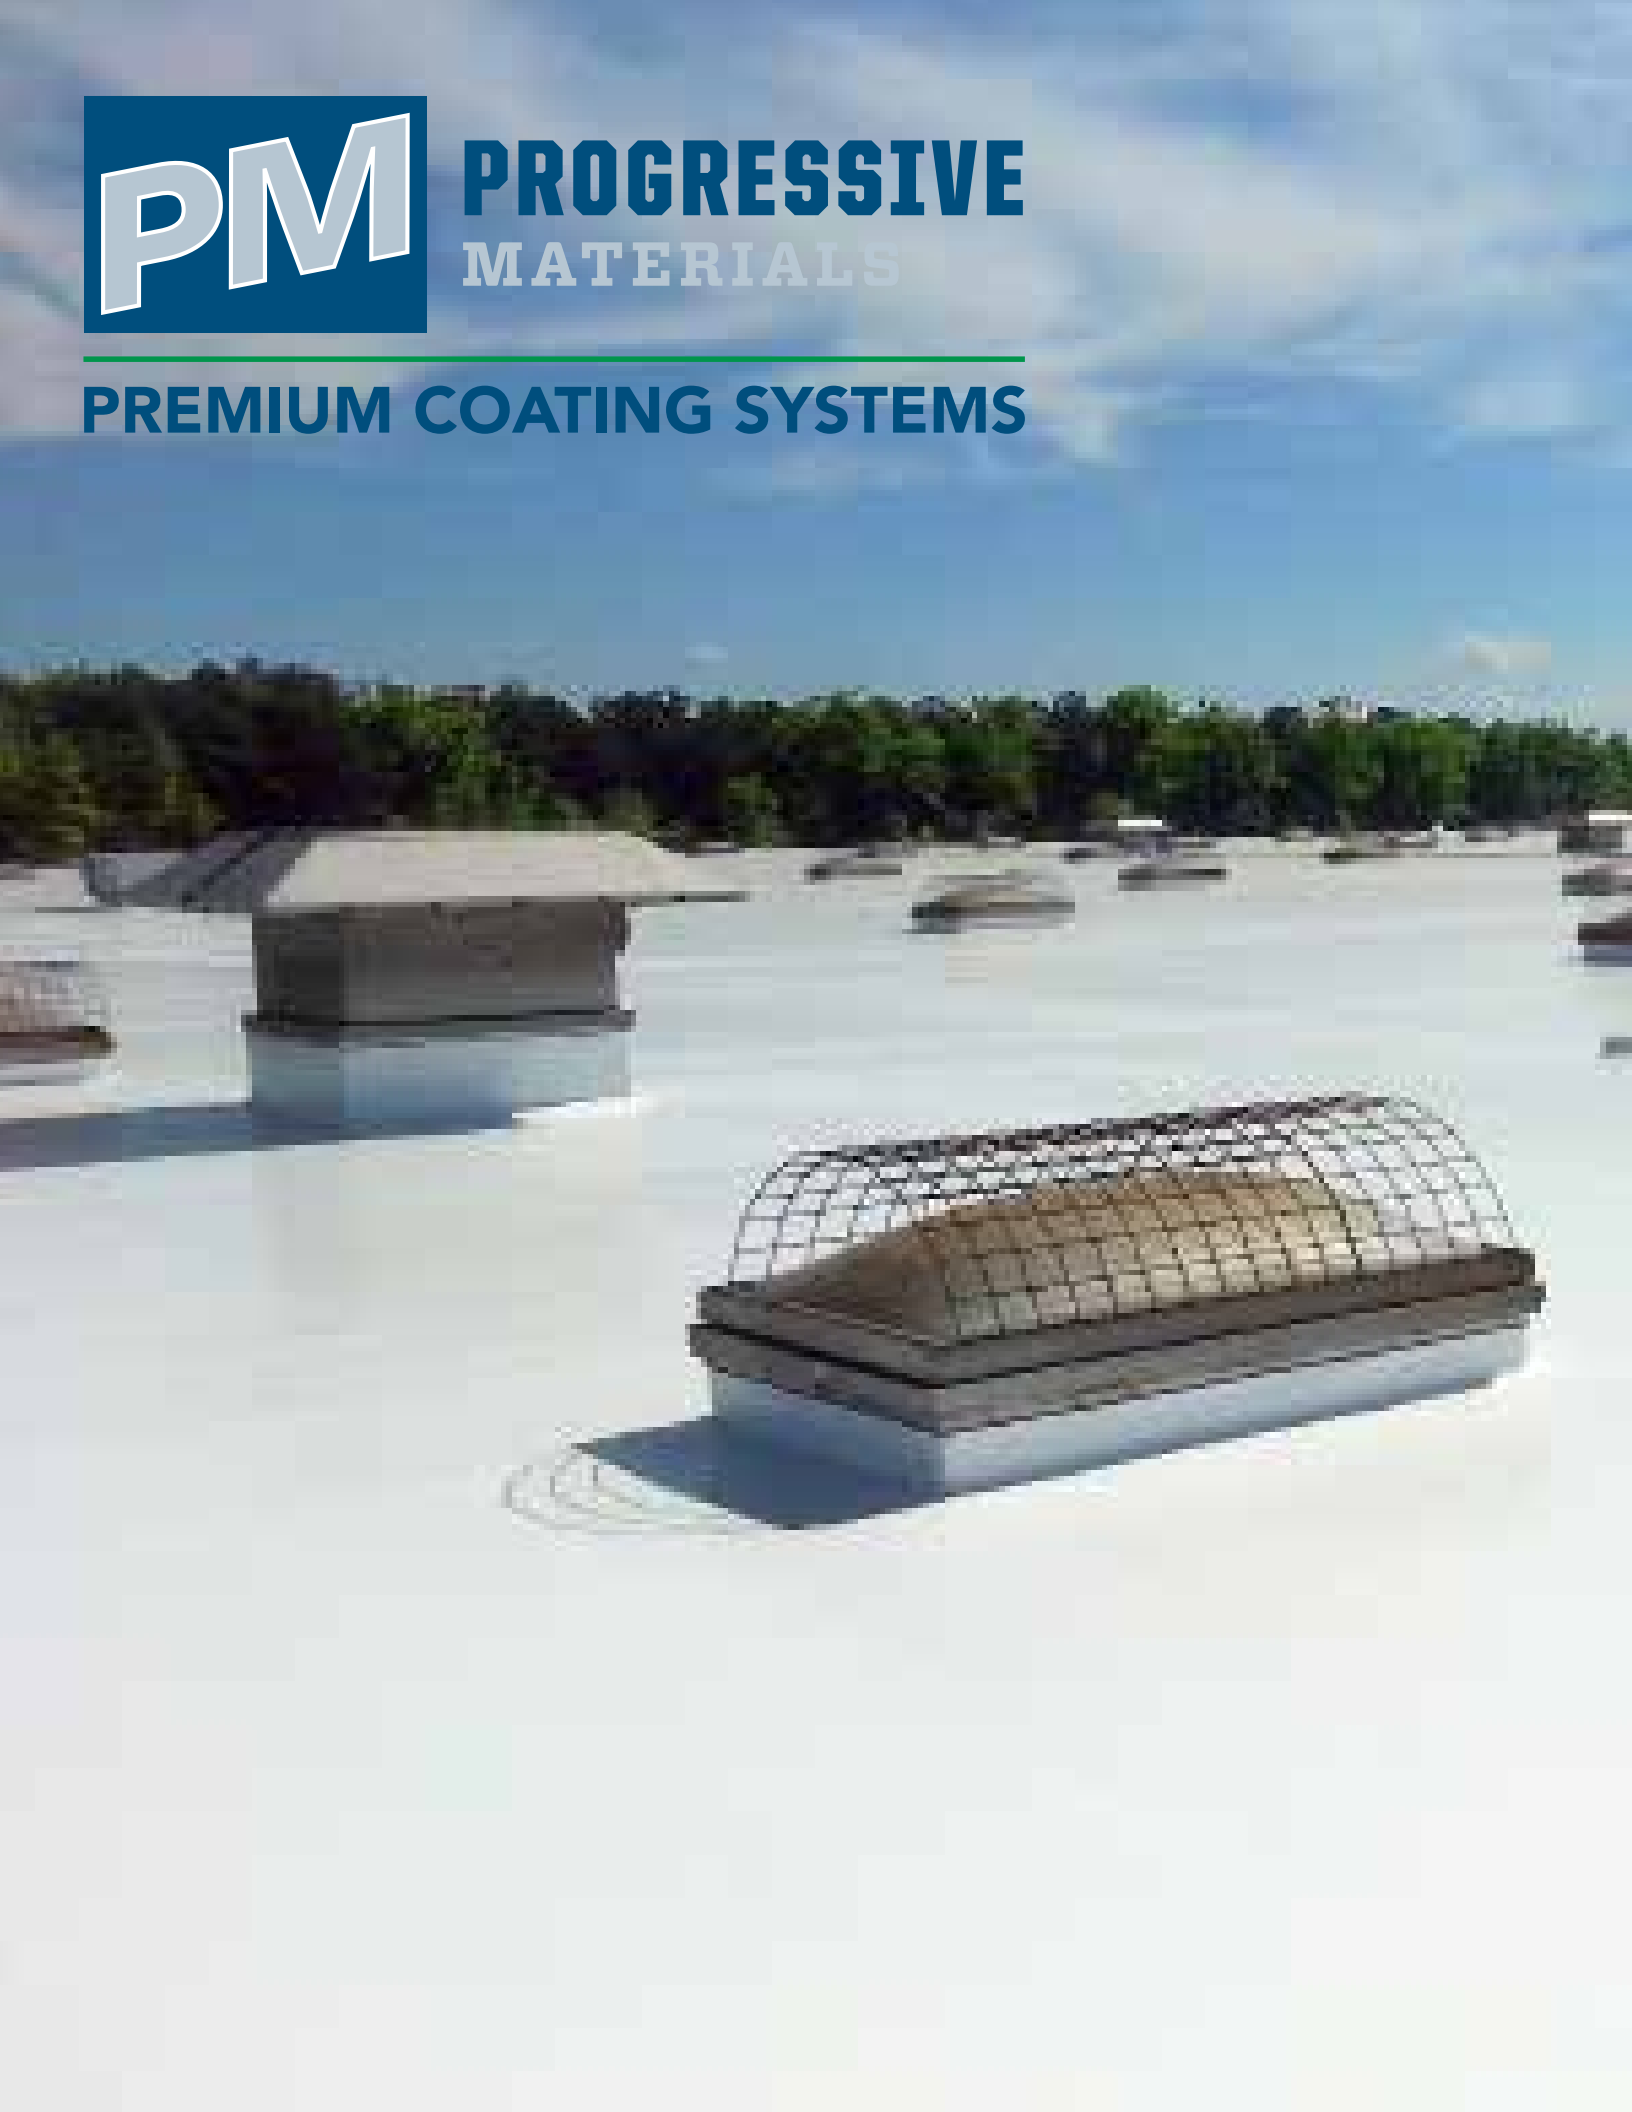



At Progressive Materials, we strive to be the most trusted team in the coatings industry, dedicated to creating a seamless experience for our customers, vendors and employees.

HS-3200 | High Solids Silicone



AVAILABLE COLORS

White, Tan, Light Gray, Dark Gray, Black, Hunter Green, Barn Red, Regal Blue, Dark Brown

Custom Colors Available!

AVAILABLE SIZES

5-Gallon Buckets
55-Gallon Drums
250-Gallon Tote

SHELF LIFE

24 Months

TECH DATA SHEET

Scan here for this product's TDS.



PRODUCT DESCRIPTION

HS-3200 Series is a high-solids, solvent-free silicone roof coating designed for the restoration and long-term protection of various commercial roofing systems. The coating provides exceptional resistance to weathering, UV exposure, ozone and extreme temperatures. It can be applied in excess of 40 mils in a single coat without blistering, allowing it to be installed in a single pass - saving you time and money. This product is also available in a "high-build" roller-grade formula.

KEY FEATURES & BENEFITS

- Quick and easy application process saves you time and increases profit.
- 5, 10, 15 & 20-year warranties available.
- Can be spray or roll-applied and adheres to nearly every substrate.
- No primer necessary in most applications.
- Low VOCs allow this product to be used nationwide.

TECHNICAL SPECS

Solids Content	92 (+/-3) (% by weight ASTM D-2369)
Tack-free time	1-2 hours (@70°F & 50% humidity)
Cure time	1-4 hours (@70 degrees & 50% humidity)
Tensile strength	325 (psi ASTM D-2370)
Elongation	300 (% ASTM D-2370)

NOTES

CREDENTIALS



SAFETY DATA SHEET

Scan here for this product's SDS.



SEE ME IN ACTION

Scan here to learn more.



HS-3200-BX | Wildlife Deterrent Silicone



AVAILABLE COLORS

White, Tan, Light Gray, Dark Gray, Black, Hunter Green, Barn Red, Regal Blue, Dark Brown

Custom Colors Available!

AVAILABLE SIZES

5-Gallon Buckets
55-Gallon Drums
250-Gallon Tote

SHELF LIFE

24 Months

TECH DATA SHEET

Scan here for this product's TDS.



PRODUCT DESCRIPTION

HS-3200-BX Series is a high-solids, solvent-free silicone roof coating that combines the waterproofing power of our HS-3200 series coating with wildlife-deterrent properties. This coating should be used on roofs where birds, rodents, insects or other wildlife are damaging the roof. Combining the same roof restorative properties as HS-3200 with the non-toxic protection against wildlife damage makes this product a must on roofs being destroyed by wildlife.

KEY FEATURES & BENEFITS

- Stops animals pecking or chewing at the roof coating and its underlying substrate.
- Non-toxic to the animals.
- Same easy application as HS-3200.
- No primer necessary in most applications.
- Low VOCs allow this product to be used nationwide.

TECHNICAL SPECS

Solids Content	92 (+/-3) (% by weight ASTM D-2369)
Tack-free time	1-2 hours (@70°F & 50% humidity)
Cure time	1-4 hours (@70 degrees & 50% humidity)
Tensile strength	325 (psi ASTM D-2370)
Elongation	300 (% ASTM D-2370)

NOTES

CREDENTIALS



SAFETY DATA SHEET

Scan here for this product's SDS.



THE PROOF IS IN THE PROFILE

Scan my project profile here.



FG-400 | Pro-Patch Flashing Grade Silicone



AVAILABLE COLORS

White, Light Gray, Black, Clear

AVAILABLE SIZES

2-Gallon Buckets
20oz. Sausage Tubes

SHELF LIFE

24 Months

TECH DATA SHEET

Scan here for this product's TDS.



PRODUCT DESCRIPTION

FG-400 Series is an ultra-thick silicone sealant designed for sealing roof penetrations that are too irregular or complex for standard application methods. This 100% silicone rubber formula offers excellent adhesion to a wide range of substrates and seals seams, offering even more protection to these trouble areas. It applies easily with a brush, trowel or putty knife, making it ideal for detail work and hard-to-reach areas. With a multitude of uses, FG-400 is the unsung hero of the PM product line.

KEY FEATURES & BENEFITS

- Thick formula seals complex penetrations where it's needed most.
- Brush, trowel or putty knife application - no special equipment needed.
- Fast moisture cure: tack-free in 1-2 hours, full cure in 16-48 hours.
- Superior adhesion to nearly all roofing membranes.
- Low odor and low VOCs (<50 g/L), suitable for use in all regions.

TECHNICAL SPECS

Solids Content	92 (+/-3) (% by weight ASTM D-2697-3)
Tack-free time	1-2 hours (@70°F & 50% humidity)
Cure time	16-48 hrs (@70 degrees & 50% humidity)
Tensile strength	235 (psi ASTM D-412)
Elongation	379 (% ASTM D-412)

NOTES

SAFETY DATA SHEET

Scan here for this product's SDS.



SEE ME IN ACTION

Scan here to watch me in action.



HS-3220 | Translucent Skylight Silicone



AVAILABLE COLORS
Clear

AVAILABLE SIZES
5-Gallon Buckets

SHELF LIFE
24 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

HS-3220 Series is a solvent-free silicone coating specifically formulated for restoring and protecting fiberglass skylights. This one-component, moisture-curing system offers long-term resistance to UV rays, weathering and extreme rooftop conditions. Its high-solids formula allows for application in excess of 40 mils in a single coat without blistering. HS-3220 maintains strong adhesion while enhancing clarity and durability. It is available exclusively in a clear finish for optimal light transmission.

KEY FEATURES & BENEFITS

- Maintains natural daylight while fully sealing out water.
- Cures into a seamless, waterproof membrane over skylights, extending their life.
- Withstands UV, rain, wind, snow and extreme temps.
- Easy to apply just like standard PM silicone coatings.
- Can be applied up to 40 mils in a single coat.

TECHNICAL SPECS

Solids Content	90 (+/-3) (% by weight ASTM D-2369)
Tack-free time	1-2 hours (@70°F & 50% humidity)
Cure time	1-4 hours (@70 degrees & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



LEARN MORE HERE
Scan here to get to know me.



SL-800 | Surface-Leveler Silicone



AVAILABLE COLORS
Red

AVAILABLE SIZES
5-Gallon Buckets
50-Gallon Drums

SHELF LIFE
24 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

SL-800 is a surface-leveling silicone designed for use on rough or uneven roofs, such as gravel-surfaced BUR or smooth BUR systems. It fills low areas to create a more uniform surface prior to applying a silicone roof coating. SL-800 can be applied by heavy-duty airless sprayer or roller and settles into surface irregularities to prepare the surface for the UV-reflective topcoat. This red, moisture-curing coating is compatible with PM's full warranted roof system and is designed to last decades.

KEY FEATURES & BENEFITS

- Self-leveling silicone fills cracks and low spots on gravel BUR and alligatored roofs.
- Creates a smoother surface so silicone coatings lay down clean.
- Reduces overall coating use, cutting material cost on uneven roofs.
- Free-flowing formula gets into every crevice for full waterproof coverage.
- Installs fast and typically cures for top coat in a day or less.

TECHNICAL SPECS

Solids Content	95 (+/- 2) (% by weight ASTM D-2369)
Tack-free time	1-2 hours (@70°F & 50% humidity)
Cure time	4-10 hours (@70 degrees & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



LEARN MORE HERE
Scan here to get to know me.



SL-851 | Ponding Water Eliminator



AVAILABLE COLORS
Speckled

AVAILABLE SIZES
5-Gallon Buckets

SHELF LIFE
24 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

SL-851 is a urethane-based roof-leveling compound formulated to eliminate ponding water on flat or low-slope roofs. It creates positive slope by filling low areas and diverting standing water to drainage areas. Its durable, fast-drying formula supports next-day application of a waterproof top coat, making it a highly efficient solution for ponding areas. Able to be used on most roofing substrates, SL-851 is ideal for slope correction, pitch-pan filling, drain areas and general roof maintenance.

KEY FEATURES & BENEFITS

- Lightweight mix fills low spots and builds slope without overloading the roof.
- Fast-drying formula allows for next-day top coat application.
- Easy to shape and trowel - ideal for drains, crickets and pitch pans.
- Compatible with nearly every roof type and can be coated with all PM products.
- Low VOC and durable - outlasts cementitious fillers with less structural stress.

TECHNICAL SPECS

Solids Content	100% (% by weight ASTM D-2369)
Cure time	8-12 hours (@70 degrees & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



LEARN MORE HERE
Scan here to get to know me.



PG-700 | Silicone Walkway System



AVAILABLE COLORS
Safety Yellow

AVAILABLE SIZES
5-Gallon Buckets
50-Gallon Drums

SHELF LIFE
24 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

PG-700 Pro-Grip is a high-build silicone coating designed to improve roof safety and surface durability. When paired with PG-750 Walkway Granules, it creates a non-skid, impact-resistant walking surface ideal for high-traffic roof areas. The coating is applied by roller and can be adjusted in thickness to meet specific performance needs. Granules should be applied generously and evenly to ensure continuous coverage and traction.

KEY FEATURES & BENEFITS

- Protects high-traffic areas from foot damage, maintenance and wear and tear.
- Thick high-build silicone formula offers thicker yield in a single pass.
- Granules create a durable, slip-resistance surface.
- The PG-700/750 system offers greater safety and UV resistance.
- Installs in just two simple steps—complete the whole system in a single day.

TECHNICAL SPECS

Solids Content	92 (+/-3%) (% by weight ASTM D-2369)
Tack-free time	1-2 hours (@70°F & 50% humidity)
Cure time	1-4 hours (@70 degrees & 50% humidity)
Tensile strength	350 (psi ASTM D-412)
Elongation	174 (% ASTM D-412)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



SEE US IN ACTION
Scan here to get to know me.



PG-750 | Walkway Granules



AVAILABLE COLORS
Safety Yellow

AVAILABLE SIZES
2-Gallon Buckets (25lbs.)

SHELF LIFE
Unlimited

TECH DATA SHEET
Scan here for this product's TDS.



SAFETY DATA SHEET
Scan here for this product's SDS.



SEE US IN ACTION
Scan here to get to know me.



PRODUCT DESCRIPTION

PG-750 Non-Slip Walkway Granules are engineered to provide durable, slip-resistant surfaces when embedded in PG-700 Yellow Walkway Coating. These granules enhance impact resistance and improve safety on high-traffic roof areas. Formulated with high-performance UV-stable pigments, PG-750 maintains its color and integrity even in harsh outdoor environments. The granules are designed to integrate seamlessly with the PG-700 system, ensuring a long-lasting, non-skid finish.

KEY FEATURES & BENEFITS

- Enhances PG-700's impact resistance and slip-resistance.
- Formulated with UV-stable pigments to maintain color in outdoor applications.
- Easy to apply - broadcast into wet PG-700 coating for immediate integration.
- Safety yellow color offers high visibility in designated walkway areas.
- Packaged in 25 lb. pails with a 5-year shelf life when stored properly.

NOTES

PS-900 | Fully-Reinforced Silicone System



AVAILABLE COLORS
White

AVAILABLE SIZES
5-Gallon Buckets
50-Gallon Drums

SHELF LIFE
12 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

PS-900 is a silicone coating designed for use as a fully-reinforced roof system. It serves as the base and intermediate coat for fabric embedment, with a quick skin-over time that allows installers more working time. Engineered for superior adhesion across a wide range of roofing substrates, PS-900 combines the strength of reinforcement with the cost-efficiency of silicone restoration. It is UV-stable, easy to apply, and can be used as a standalone roof substrate or a restoration coating.

KEY FEATURES & BENEFITS

- Combines a base coat, fabric and an intermediate coat for optimal performance.
- Reinforced design delivers added strength and durability.
- Cost-effective base layers lower material costs without sacrificing protection.
- UV-stable with excellent adhesion to most existing roof substrates.
- Can be used as the building's initial roof system - not just a renovation product.

TECHNICAL SPECS

Solids Content	80 (+/- 2) (% by weight ASTM D-2369)
Tack-free time	15 minutes (@70°F & 50% humidity)
Cure time	1-4 hours (@70 degrees & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



SEE ME IN ACTION
Scan here to watch me in action.



LS-2200 | Regular Solids Silicone



AVAILABLE COLORS

White, Tan, Light Gray, Dark Gray, Black, Hunter Green, Barn Red, Regal Blue, Dark Brown

Custom Colors Available!

AVAILABLE SIZES

5-Gallon Buckets
50-Gallon Drums

SHELF LIFE

12 Months

TECH DATA SHEET

Scan here for this product's TDS.



PRODUCT DESCRIPTION

LS-2200 Series is a solvent-based silicone roof coating specifically formulated for sprayed-in-place polyurethane foam systems, although it can be used on most surfaces. It delivers long-term protection by resisting UV radiation, ozone, oxidation and severe weather conditions. The coating forms a flexible, durable membrane that remains stable even under extreme rooftop temperatures. Its high-performance formulation extends the life of foam roofing while maintaining elasticity.

KEY FEATURES & BENEFITS

- Bonds to nearly any substrate with no primer needed in most cases.
- Withstands ponding water and extreme weather without breaking down.
- Cures fast in cool, humid conditions to extend your roofing season.
- Apply up to an hour before rain—no risk of wash-off.
- Won't chalk, haze or degrade from long-term UV exposure.

TECHNICAL SPECS

Solids Content	82 (+/-3) (% by weight ASTM D-2369)
Tack-free time	10-20 minutes (@70°F & 50% humidity)
Cure time	1-3 hours (@70 degrees & 50% humidity)
Tensile strength	551 (+/- 25) (psi ASTM D-412)
Elongation	186 (+/- 10) (% ASTM D-412)

CREDENTIALS



NOTES

SAFETY DATA SHEET

Scan here for this product's SDS.



LEARN MORE HERE

Scan here to get to know me.



HS-3230 | Metallic Series Silicone



AVAILABLE COLORS

Metallic Copper, Metallic Gold, Metallic Aluminum

AVAILABLE SIZES

5-Gallon Buckets
55-Gallon Drums

SHELF LIFE

24 Months

TECH DATA SHEET

Scan here for this product's TDS.



PRODUCT DESCRIPTION

HS-3230 Series is a premium silicone roof coating infused with metallic pigments to enhance reflectivity and offer a metallic shine to existing roofs. Designed for use as a top coat over HS-3200, it provides added aesthetic value without compromising performance. The coating offers long-term protection against UV rays, extreme weather, oxidation and environmental stress. Its high-solids formula ensures a strong, watertight roof while maintaining the visual appeal of a metallic finish.

KEY FEATURES & BENEFITS

- Adds a metallic finish without sacrificing silicone performance.
- Installs over cured HS-3200 or LS-2200 at just 5 mils, saving you product cost.
- Is renewable - can be re-coated in 10 or 20 years to renew desired luster.
- Highly reflective for added energy efficiency and curb appeal.
- Same durability and waterproof protection as our other silicone products.

TECHNICAL SPECS

Solids Content	86 (+/-3%) (% by weight ASTM D-2369)
Tack-free time	1-2 hours (@70°F & 50% humidity)
Cure time	1-4 hours (@70 degrees & 50% humidity)

NOTES

SAFETY DATA SHEET

Scan here for this product's SDS.



LEARN MORE HERE

Scan here to get to know me.



RP-300 | Patch & Repair Sealant



AVAILABLE COLORS
White, Gray, Black

AVAILABLE SIZES
2-Gallon Buckets
10.1oz. Caulk Tubes
20oz. Sausages

SHELF LIFE
12 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

RP-300 is one of those products every roofer should have on hand. This fibered mastic is thick, flexible and built to stop leaks fast - even under water. Easily applied, RP-300 clings to flat or vertical surfaces, and cures into a watertight seal. Whether you're sealing around flashings or patching a crack on the fly, RP-300 is ready to go straight from the pail with no mixing required. It's compatible with silicone and acrylic systems and built to perform in just about any conditions.

KEY FEATURES & BENEFITS

- Stops active leaks instantly - even under water or on wet surfaces.
- Adheres to nearly anything, including KYNAR® and vertical substrates.
- Applies in freezing temps down to -20°F for true emergency repairs.
- No mixing required - just open, trowel and go.
- Compatible with both silicone and acrylic coatings for easy tie-ins.

TECHNICAL SPECS

Solids Content	96 (+/-2) (% by weight ASTM D-2369)
Skin Over time	15 minutes (@70°F & 50% humidity)
Cure time	16-48 hours (@70 degrees & 50% humidity)
Tensile strength	287 (psi ASTM D-412)
Elongation	163 (% ASTM D-412)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



SEE ME IN ACTION
Scan here to watch me in action.



AC-1200 | Acrylic Coating



AVAILABLE COLORS

White, Reflective Tan, Light Gray, Dark Gray, Santa Fe Tan

AVAILABLE SIZES

5-Gallon Buckets
50-Gallon Drums
250-Gallon Tote

SHELF LIFE

12 Months

TECH DATA SHEET

Scan here for this product's TDS.



PRODUCT DESCRIPTION

AC-1200 is a high-performance acrylic roof coating built from the ground up using premium resins and increased solids content. This upgraded formula offers improved adhesion to nearly all substrates, stronger elongation and greater tensile strength for long-term durability. It resists dirt pickup to help roofs stay bright and reduces chalk-off for extended coating life. Designed to perform without sacrificing affordability, AC-1200 sets a new standard for all-purpose acrylic roof coatings.

KEY FEATURES & BENEFITS

- Increased solids content delivers a stronger, more reliable final product.
- Premium resin improves adhesion across nearly all roofing substrates.
- Enhanced dirt pickup resistance keeps roofs brighter and UV reflective.
- Upgraded raw materials boost elongation, tensile strength and durability.
- Lower chalk-off rate extends the life of the coating and reduces maintenance.

TECHNICAL SPECS

Solids Content	53 (+/-2) (% by weight ASTM D-2369)
Tack-free time	1-4 hours (@70°F & 50% humidity)
Cure time	4-8 hours (@70 degrees & 50% humidity)
Tensile strength	288 (+/- 50) (psi ASTM D-2370)
Elongation	388 (+/- 25) (% ASTM D-2370)

NOTES

SAFETY DATA SHEET

Scan here for this product's SDS.



LEARN MORE HERE

Scan here to get to know me.



AM-400 | Acrylic Mastic



AVAILABLE COLORS
White, Light Gray

AVAILABLE SIZES
2-Gallon Buckets

SHELF LIFE
12 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

AM-400 is a thick, high-quality water-based acrylic mastic designed for sealing irregular roof penetrations and detailing areas that can't be reached with standard spray or roller applications. It offers strong adhesion and flexibility across a wide range of roofing substrates. AM-400 is compatible with BUR, modified bitumen, metal roofs, EPDM and various coverboards. Its durable formulation makes it ideal for addressing complex penetrations and restoration.

KEY FEATURES & BENEFITS

- Thick formula seals seams, penetrations and irregular details with ease.
- Pairs perfectly with AC-1200 for a complete acrylic roof system.
- Can also be used as a standalone repair product.
- Easy to apply with brush or trowel - no special tools required.
- Water-based and low VOC for jobsite flexibility and compliance.

TECHNICAL SPECS

Solids Content	53 (+/-2) (% by weight ASTM D-2369)
Tack-free time	1-4 hours (@70°F & 50% humidity)
Cure time	16-48 hours (@70 degrees & 50% humidity)
Tensile strength	400 (+/- 50) (psi ASTM D-412)
Elongation	350 (+/- 25) (% ASTM D-412)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



LEARN MORE HERE
Scan here to get to know me.



MS-550 | Mineral Spirits



PRODUCT DESCRIPTION

MS-550 Mineral Spirits is an aliphatic solvent formulated specifically for use with silicone roof coatings. It serves as both a thinning agent for PM silicone and a cleaning solvent for silicone spray equipment. Hydrotreated to minimize aromatics and olefins, MS-550 meets key regulatory standards including PD-680 Type I and the 66/3 Rule. It also complies with several FDA UV requirements, making it suitable for a wide range of industrial and commercial roofing applications.

KEY FEATURES & BENEFITS

- Thins PM silicone coatings for easier spray application.
- Cleans silicone spray equipment and hoses efficiently.
- Hydrotreated to reduce aromatics and olefins.
- Meets 66/3 Rule requirements and federal specification PD-680, Type I.
- Clear, low-odor solvent with a flash point of 106°F.

AVAILABLE COLORS

Clear

AVAILABLE SIZES

5-Gallon Buckets

SHELF LIFE

36 Months

NOTES

TECH DATA SHEET

Scan here for this product's TDS.



SAFETY DATA SHEET

Scan here for this product's SDS.



SEE MORE HERE

Visit me in our online store.



P-100 | SPF Primer



AVAILABLE COLORS
Black

AVAILABLE SIZES
5-Gallon Buckets
50-Gallon Drums

SHELF LIFE
12 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

P-100 is an acrylic primer designed to enhance adhesion and withstand UV rays on SPF roofs prior to the top coat application. Formulated with advanced polymers and wetting agents, P-100 delivers superior surface bonding. Its breathable membrane allows trapped moisture to escape while maintaining a watertight seal. P-100 is an ideal foundation for foam roofing applications that cannot be coated the same day the foam is installed.

KEY FEATURES & BENEFITS

- Designed to prime SPF roofs and protect it from UV rays prior to top coating it.
- Specialized polymers maximize adhesion while allowing moisture to escape.
- Water-based, plasticizer-free and low VOC (<50 g/L) for compliance nationwide.
- Easy application - sprayed or rolled at 1 gallon per 200 sq. ft.

TECHNICAL SPECS

Solids Content	52 (+/-2) (% by weight ASTM D-2369)
Re-Coat time	6-10 hours (@70 degrees & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



PM PRIMER GUIDE
See how much to use here.



P-110 | EPDM Bleed-Block Primer



AVAILABLE COLORS
Gray

AVAILABLE SIZES
5-Gallon Buckets
55-Gallon Drums

SHELF LIFE
24 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

P-110 is a water-based, single-component acrylic primer specifically developed for EPDM roofing surfaces. Free of plasticizers, it promotes strong adhesion of silicone coatings while preventing discoloration from chemical bleed-out in the EPDM membrane. P-110 ensures a clean, stable surface for coating application, improving both performance and aesthetics. It is an essential step in preparing EPDM roofs for long-term silicone restoration.

KEY FEATURES & BENEFITS

- Blocks chemical bleed-through from EPDM, preventing discoloration of topcoats.
- Enhances adhesion of silicone coatings to properly cleaned EPDM surfaces.
- Water-based, plasticizer-free, low VOCs (<50 g/L) - compliant in all regions.
- Easy application - sprayed on at 1 gallon per 200 sq. ft.

TECHNICAL SPECS

Solids Content	50 (+/-2) (% by weight ASTM D-2369)
Re-Coat Time	6-10 hours (@70°F & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



PM PRIMER GUIDE
See how much to use here.



P-120 | EPDM Rinseable Cleaner



PRODUCT DESCRIPTION

P-120 is a zero-VOC, water-based primer/roof wash formulated for cleaning and preparing aged EPDM roofing surfaces. This high-performance primer is designed to be applied and then rinsed off, removing surface contaminants and release agents. P-120 can be applied using spray, brush or roller and is an essential step for ensuring proper adhesion of subsequent coatings. It offers a simple, effective solution for prepping EPDM roofs prior to restoration.

KEY FEATURES & BENEFITS

- Essential first step for prepping aged EPDM before silicone coating.
- Breaks down surface films to improve coating adhesion.
- Zero VOC, water-based formula - compliant in all regions.
- Easy application - sprayed on at 1 gallon per 500 sq. ft.

AVAILABLE COLORS

Clear

AVAILABLE SIZES

5-Gallon Buckets

SHELF LIFE

730 Days

NOTES

TECH DATA SHEET

Scan here for this product's TDS.



SAFETY DATA SHEET

Scan here for this product's SDS.



PM PRIMER GUIDE

See how much to use here.



P-130 | Rust Inhibitive Primer



AVAILABLE COLORS
Red

AVAILABLE SIZES
5-Gallon Buckets
50-Gallon Drums

SHELF LIFE
12 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

P-130 is a high-quality primer formulated to inhibit rust and promote adhesion on metal roof surfaces. With low VOC content, it offers an environmentally responsible solution for protecting and preparing metal substrates. P-130 can be applied by spray, brush or roller, making it versatile for various jobsite conditions. It helps prevent corrosion while creating a stable base for subsequent roof coatings. Ideal for use on aging or weathered metal roofs requiring surface restoration and protection.

KEY FEATURES & BENEFITS

- Prevents rust growth on metal roof surfaces, extending roof life.
- Red appearance allows for easy identification during application.
- Water-based, low-VOC formula (<65 g/L) compliant in all regions.
- Easy application - sprayed on at 1 gallon per 200 sq. ft.

TECHNICAL SPECS

Solids Content	41 (+/-3) (% by weight ASTM D-2369)
Re-Coat Time	6-10 hours (@70°F & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



PM PRIMER GUIDE
See how much to use here.



P-140 | 2-Part Epoxy Concrete Primer



AVAILABLE COLORS

Gray

AVAILABLE SIZES

5-Gallon Buckets

SHELF LIFE

12 Months

TECH DATA SHEET

Scan here for this product's TDS.



SAFETY DATA SHEET

Scan here for this product's SDS.



PM PRIMER GUIDE

See how much to use here.



PRODUCT DESCRIPTION

P-140 is a two-part primer engineered to enhance the adhesion of PM silicone coatings on concrete roofs. It is also effective on metal, wood, single-ply membranes and existing coatings. P-140 is user-friendly, low-odor and easy to clean up, making it ideal for jobsite efficiency and safety. Its strong bonding capabilities ensure long-term performance of silicone roof systems. Versatile and reliable, P-140 is a go-to solution for challenging surface conditions.

KEY FEATURES & BENEFITS

- Strengthens silicone adhesion on concrete roofs.
- Two-part, water-based formula with low odor and easy cleanup.
- Simple 1:1 mix ratio with a 2-hour pot life at 75°F.
- Easy application - sprayed on at 1 gallon per 150-200 sq. ft.

TECHNICAL SPECS

Solids Content	60 (+/-2) (% by weight ASTM D-2369)
Re-Coat time	24 hours (@70°F & 50% humidity)

NOTES

P-151 | Single-Ply Primer



AVAILABLE COLORS
Charcoal

AVAILABLE SIZES
5-Gallon Buckets

SHELF LIFE
12 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

P-151 is a fast-drying primer specifically formulated for TPO and PVC. It enhances adhesion of silicone coatings on both weathered and unweathered surfaces and can also be used on a variety of other roof types. P-151 is resistant to ponding water, offering added protection in low-slope areas. For best results, it should be applied to a clean, contaminant-free surface. Designed to work in tandem with silicone roof coatings, P-151 ensures long-lasting adhesion and performance.

KEY FEATURES & BENEFITS

- Enhances adhesion of silicone coatings to TPO and PVC.
- Fast-drying formula allows for silicone top coat application within 1–2 hours.
- Resists ponding water, providing additional protection on your roof.
- Easy application - sprayed on at 1 gallon per 330 sq. ft.

TECHNICAL SPECS

Solids Content	11 (+/-2) (% by weight ASTM D-2369)
Re-Coat time	1-2 hours (@70°F & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



PM PRIMER GUIDE
See how much to use here.



P-160 | Asphalt Bleed-Block Primer



AVAILABLE COLORS
Gray

AVAILABLE SIZES
5-Gallon Buckets
50-Gallon Drums

SHELF LIFE
12 Months

TECH DATA SHEET
Scan here for this product's TDS.



PRODUCT DESCRIPTION

P-160 is a high-quality, water-based acrylic primer designed for use over smooth asphalt roof surfaces. This primer enhances adhesion of silicone roof coatings while preventing discoloration caused by chemical bleed-through. P-160 acts as a protective barrier, ensuring a clean, stable surface for coating application. It can be applied by spray, brush or roller, with spray application preferred for optimal coverage. P-160 is an essential step in restoring asphalt roofs with silicone systems.

KEY FEATURES & BENEFITS

- Prevents yellowing of silicone coatings by blocking asphalt bleed-through.
- Enhances adhesion of silicone coatings to smooth asphalt roof surfaces.
- Low VOC (<50 g/L) formula for compliance in all regions.
- Easy application - sprayed on at 1 gallon per 100 sq. ft.

TECHNICAL SPECS

Solids Content	50 (+/-2) (% by weight ASTM D-2369)
Re-Coat time	1-2 hours (@70°F & 50% humidity)

NOTES

SAFETY DATA SHEET
Scan here for this product's SDS.



PM PRIMER GUIDE
See how much to use here.



PF-200 | Polyester Reinforcing Fabric



PRODUCT DESCRIPTION

Pro-Mesh PF-200 is a stitch-bonded, low-profile polyester fabric designed to reinforce silicone roofing and waterproofing systems. Used in conjunction with all PM systems, it forms a strong yet flexible membrane. PF-200 strengthens seams, flashings and high-stress areas for long-term durability. Its conforming nature allows it to adapt to roof contours while improving overall system performance. PF-200 is an essential component for long-lasting, reinforced roof restoration assemblies.

KEY FEATURES & BENEFITS

- Reinforces joints, flashings and seams to repair and prevent cracking and splitting.
- Stitch-bonded polyester conforms to irregular surfaces without wrinkling.
- Fully saturates with silicone to create a seamless, watertight membrane.
- Essential for 3-course applications in fully reinforced or detail-specific areas.
- Available in a variety of sizes and works with all PM coating systems.

AVAILABLE COLORS

White

AVAILABLE SIZES

324' per roll
Cut up to 40 inches

NOTES

TECH DATA SHEET

Scan here for this product's TDS.



SAFETY DATA SHEET

Scan here for this product's SDS.



SEE MORE HERE

Scan here to learn more.



MRV-600 | Moisture Relief Vent

PRODUCT DESCRIPTION

The MRV-600 Roof Vent is designed to extend the life of roofing systems by relieving trapped moisture and air pressure from within the roof assembly. Excess pressure and moisture can compromise insulation performance and lead to roof deck deterioration. The vent features a vandal-resistant cap that offers added security while blocking wind-driven rain and snow. Durable and effective, the MRV-600 helps maintain roof integrity and thermal efficiency over time.

KEY FEATURES & BENEFITS

- Reduces trapped moisture & air pressure to prevent insulation and deck damage.
- Vandal-proof aluminum cap keeps out wind-driven rain and snow.
- Installs quickly - just cut, fasten, and flash with silicone or fleece tape.
- Recommended at 1 vent per 500 sq. ft. for optimal moisture control.
- Compatible with all PM silicone systems, PF-200 fabric or FT-500 tape.



AVAILABLE COLORS

Aluminum

AVAILABLE SIZES

25 vents per box

NOTES

TECH DATA SHEET

Scan here for this product's TDS.



SEE MORE HERE

Scan here to learn more.



FT-500 | Butyl Fleece Tape

PRODUCT DESCRIPTION

FT-500 Butyl Fleece Tape is a flexible, moldable sealing tape made from butyl rubber with an absorbent polyester fleece face. It is designed to prevent moisture intrusion and create a durable seal across a variety of roof surfaces. Ideal for use on EPDM roofs, FT-500 conforms easily to irregular shapes and surfaces. Its versatility makes it an excellent choice for sealing curbs, penetrations and rooftop equipment. FT-500 is a dependable solution for long-lasting, watertight protection in critical detail areas.

KEY FEATURES & BENEFITS

- Seals seams, joints and penetrations to prevent moisture intrusion.
- Flexible and moldable for easy application around curbs and rooftop equipment.
- Compatible with metal panels, single-ply membranes and smooth asphalt roofs.
- Not suitable for application over silicone coatings.
- Works into the PM warranty spec for EPDM roofs.



AVAILABLE COLORS

Gray

AVAILABLE SIZES

4 - 65.5' rolls per box

SHELF LIFE

Unlimited

NOTES

TECH DATA SHEET

Scan here for this product's TDS.



SAFETY DATA SHEET

Scan here for this product's SDS.



SEE MORE HERE

Scan here to learn more.



SS-300 | Silicone Caulk



PRODUCT DESCRIPTION

SS-300 Series is a medium-modulus silicone sealant formulated for roofing and general joint applications. It delivers strong, flexible adhesion without the need for primer on most substrates. The sealant is ideal for sealing joints and seams where long-term durability and weather resistance are required. Surfaces must be properly cleaned and prepared to ensure optimal performance. SS-300 is a reliable solution for sealing details and joints across a variety of commercial roofing systems.

KEY FEATURES & BENEFITS

- Medium-modulus silicone ideal for sealing joints, seams and flashing details.
- Primerless adhesion to most nonporous substrates saves time on prep.
- Tack-free in 30–60 minutes; full cure in 16–48 hours at 3/8" depth.
- Handles ±45% joint movement with 600% elongation for long-term flexibility.
- Low VOC (<50 g/L) and performs in temps from -50°F to +280°F.

TECHNICAL SPECS

Solids Content	97 (+/-2) (% by weight ASTM D-2369)
Tack-free time	1 hour (@70°F & 50% humidity)
Cure time	16-48 hours (@70 degrees & 50% humidity)
Tensile strength	140 (psi ASTM D-412)
Elongation	600 (% ASTM D-412)

AVAILABLE COLORS

White, Tan, Light Gray, Black, Clear

AVAILABLE SIZES

10.1oz. Caulk Tubes

SHELF LIFE

12 Months

NOTES

TECH DATA SHEET

Scan here for this product's TDS.



SAFETY DATA SHEET

Scan here for this product's SDS.



LEARN MORE HERE

See application tips here.



Installation Overviews



RCR OVER CONCRETE



RCR OVER EPDM



RCR OVER GRAVEL BUR



RCR OVER METAL



RCR OVER MOD BIT



RCR OVER SILICONE RE-COAT



RCR OVER SINGLE PLY



FULLY REINFORCED SYSTEM



Silicone Coverage Guide

	PVC, TPO, Hypalon	EPDM	Metal	Mod Bit, Smooth BUR	Gravel BUR	Concrete	Silicone Recoat
5-Year Warranty							
Dry Mills Required	20	20	15	25	30	25	20
Wet Mills Required	23	23	17	28	33	28	23
Gallons/Square	1.5	1.5	1.2	1.9	2.3	1.9	1.5
SF/5-G Bucket	325	325	433	260	217	260	325
Marking Square	18' x 18'	18' x 18'	20.5' x 20.5'	16' x 16'	14.5' x 14.5'	16' x 16'	18' x 18'
10-Year Warranty							
Dry Mills Required	25	25	20	30	35	30	25
Wet Mills Required	28	28	23	33	38	33	28
Gallons/Square	1.9	1.9	1.5	2.3	2.7	2.3	1.9
SF/5-G Bucket	260	260	325	217	186	217	260
Marking Square	16' x 16'	16' x 16'	18' x 18'	14.5' x 14.5'	13.5' x 13.5'	14.5' x 14.5'	16' x 16'
15-Year Warranty							
Dry Mills Required	30	30	25	35	40	35	30
Wet Mills Required	33	33	28	38	43	38	33
Gallons/Square	2.3	2.3	1.9	2.7	3.1	2.7	2.3
SF/5-G Bucket	217	217	260	186	163	186	217
Marking Square	14.5' x 14.5'	14.5' x 14.5'	16' x 16'	13.5' x 13.5'	12.5' x 12.5'	13.5' x 13.5'	14.5' x 14.5'
20-Year Warranty							
Dry Mills Required	35	35	30	40	45	40	N/A
Wet Mills Required	38	38	33	43	48	43	N/A
Gallons/Square	2.7	2.7	2.3	3.1	3.3	3.1	N/A
SF/5-G Bucket	186	186	217	163	140	163	N/A
Marking Square	13.5' x 13.5'	13.5' x 13.5'	14.5' x 14.5'	12.5' x 12.5'	11.5' x 11.5'	12.5' x 12.5'	N/A

Acrylic Coverage Guide

	PVC, TPO, Hypalon	EPDM	Metal	Mod Bit, Smooth BUR	Gravel BUR	Concrete
10-Year Warranty						
Dry Mills Required	N/A	22	22	25	N/A	25
Wet Mills Required	N/A	44	44	50	N/A	50
Gallons/Square	N/A	2.5	2.5	3	N/A	3
SF/5-G Bucket	N/A	190	190	166	N/A	166
Marking Square	N/A	13.7' x 13.7'	13.7' x 13.7'	12.7' x 12.7'	N/A	12.7' x 12.7'



**PREMIUM
COATING SYSTEMS**